

DESIGNED FROM HISTORY



1963 The Isuzu Wasp is released as the 1st ute in Isuzu's history

1972 The Isuzu Faster is released and is exported all around the world

1980 Isuzu 'pick-up' or 'KB' is offered in three cab styles: single, spce and crew cab

Founded in 1916, Isuzu Motors has the longest history of any Japanese vehicle manufacturer and is one of the world's largest producers of commercial vehicles spanning light, medium and heavy weight classes. Isuzu Motors is also the world's largest commercial diesel engine manufacturer, producing over 22 million engines to date. Isuzu diesel engines are relied upon by top-level automobile manufacturers around the world for their superior performance and exceptional fuel economy.

The origin of Isuzu's D-MAX ute can be traced back to the Isuzu WASP in 1963, which was produced under the initiative to build a car that looked like a passenger vehicle but functioned as a truck. Over the next 40 years, backed by record sales, Isuzu utes were exported to North America, South Africa, Australia and other markets around the world, where to this day, over two million people depend on the strength, reliability and economy of Isuzu utes.





1988 A monumental feat saw the Isuzu ute become the widest body in its class



2002 The internationally branded Isuzu D-MAX ute is launched worldwide



2010 Isuzu D-MAX impresses with its tough, stylish and economical model line-up

Fuel Consumption Figures

Isuzu D-MAX Models	Transmission	Combined Fuel Consumption ^Δ
4x2 SX Single Cab Chassis Low-Ride	Manual	8.0L/100km
4x2 SX Crew Cab Ute Low-Ride	Manual	8.2L/100km
4x2 SX Crew Cab Ute High-Ride	Automatic	8.0L/100km
4x4 Single, Space and Crew Cab models	Manual	8.3L/100km
4x4 Single, Space and Crew Cab models	Automatic	8.1L/100km



Improved redesign of fuel injector pintle caps for optimum efficiency



State-of-the-art aerodynamic exterior design and testing for minimal drag



Multi Information Display of instant and average fuel consumption



Fuel efficient sequential shift 5-speed automatic transmiss

DEPEND ON IT FOR FUELECONDMY

This philosophy guides us in perfecting our technology, and creating vehicles with a conscience. This philospohy is no better illustrated than in our Isuzu D-MAX.

The "Pursuit of people's trust" underlies product development at Isuzu. As a matter of principle, To reduce the environmental impact of vehicles, Isuzu is fully committed to lowering emissions the vehicles we manufacture must be worthy of the trust of our customers and stakeholders. over the course of a vehicle's life cycle - from materials procurement to disposal and recycling.



Institute where the Bullet train is developed. Advanced refinement in the wind tunnel of Italian in cabin noise levels adding to passenger comfort.

Sporting sleek exterior styling, the Isuzu D-MAX has further improved on its renown fuel efficiency auto design house Pininfarina has ensured the Isuzu D-MAX is the most aerodynamic yet with and performance after extensive wind tunnel testing at the Japan Railway Technical Research record low Cd (drag coefficiency) figures. This development has also realised an improvement

> ^ATested to ADR 81/02, the Australian government's standard lab based test. Your fuel figures depend on driving style, conditions of usage, vehicle condition and load, and other factors.

73.5T Towing


thanks to lower friction, fuel injection optimisation and a new large front-mounted intercooler.

DIMAK

Performance upgrades haven't been ignored either, with the Isuzu D-MAX range powered by This advanced Euro4-compliant unit generates 130kW of power and a peak torque output of a highly refined 3-litre turbo diesel common rail engine which offers improved fuel efficiency 380Nm at a low 1800rpm. The torque is delivered across a flat curve through a large majority of the rev-range to aid drivability and make towing up to 3.5 tonne* a breeze.

Mated to an advanced five-speed 'Rev-Tronic' automatic transmission with sequential sports points and lock-up points depending on the driver's behaviour, the vehicle speed and the mode, the auto box is electronically controlled by the transmission control module (TCM) vehicle load. A smooth shift manual transmission is also available. It features an improved gearand features an adaptive-learning function which constantly monitors brake and throttle lever pivot point, reducing gear-shift travel for a sportier feel. applications. This allows the transmission to automatically select the most appropriate shift

*Braked towing on 4x4 models.

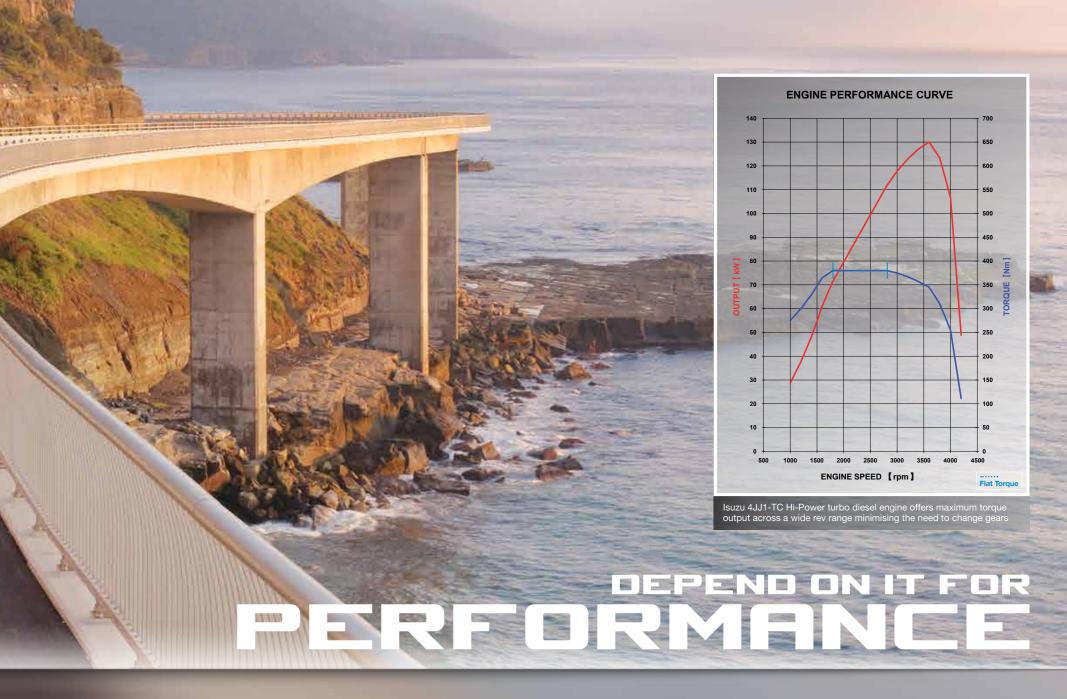

SPIRIT OF TRUCK



Almost a century of truck-manufacturing DNA has gone into the Isuzu D-MAX and it remains utes, every Isuzu D-MAX is backed by a five-year warranty and five-year Roadside Assistance the only ute produced by a commercial vehicle manufacturer. A brand new truck-tough chassis package[^] – which adds further peace of mind when it comes to protecting your investment. means even better balance and performance whether loaded or not, delivering superior stability and roadholding in all conditions.

The Isuzu D-MAX comes from a lineage of the world's toughest, most reliable workhorses. As a testament to the immense confidence we have in building durable, reliable and efficient



Advanced anti-friction melt-in liner technology eliminates the need for cylinder liners



Lifetime stainless steel timing chain (not poly belt)



Optimised automatic and manual transmissions with equal maximum torque output




Sophisticated engine head; cam-to-valve roller bearings and variable swirl action gas flow




Independent double wishbone and gas shock absorber front suspension. Over slung rear springs for improved off-road operation*



High pressure common rail fuel injection system minimises the amount of fuel needed in the combustion process, providing superior fuel economy



Larger sized intercooler means a greater thermo-cooling capacity

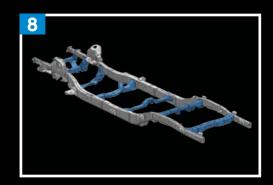

A stronger, durable yet lighter ladder chassis design

Designed with superior know-how combined with state-of-the-art Japanese technology, you don't just get a ute, you get true 'Spirit of Truck' with every Isuzu D-MAX.

[^]5yr/130,000km whichever occurs first, excludes Government & National Rental customers. *Available only on 4x2 High-Ride and all 4x4 models.



Electroluminescent instrument display gives clear vision to the drive



All LS-models[^] are equipped with steering whee cruise, audio and Bluetooth[®] function controls



Remote keyless entry



Glove compartment (lower) and article storage compartment (upper) with easy access power outle



Dual function storage compartment and cupholder

DEPEND ON IT FOR CONVENIENCE

At your finger tips you will find all the technology and modern conveniences you have come to Bluetooth[®] hands free phone connectivity¹ (excludes EX model). LS models[^] also feature Isuzu's expect in a new ute. From the entry-level Isuzu D-MAX 4x2 SX Single Cab Chassis through to 'Sky Sound' roof-mounted surround sound system and a leather steering wheel featuring cruise the top-of-the-range 4x4 LS-U Crew Cab Ute, the Isuzu D-MAX offers a generous complement and audio controls. Remote keyless entry, power windows and mirrors are standard on SX & of standard equipment, including cruise control and Multi-Information Display (MID), air LS Models. You will also discover a host of convenient storage compartments and cup holders. conditioning with a fine-particle pollen filter and an audio system with mini-USB input, iPod[®] and

100



 $^1Bluetooth^{\odot}$ connectivity depends on your phone compatability. $^{\circ}Only$ on LS, LS-U, and LS-M models.

Bluetooth $^{\otimes}$ word mark is owned by the Bluetooth SIG, Inc. iPod $^{\otimes}$ is a trademark of Apple, Inc.

DEPEND ON IT FOR SAFETY ANE OMFORT

airbags (dual front, curtain and side), Electronic Stability Control (ESC), Traction Control System (TCS) and 4-channel 4-sensor ABS (Anti-skid Brake System) with EBD (Electronic Brakeforce Distribution) and Brake Assist (BA). A high-strength tailor blank welded passenger safety cell with side impact D-MAX LS models, as are projector lens headlights. All this adds up to give the Isuzu D-MAX a anti-intrusion bars also increases occupant safety.

The entire D-MAX range comes standard with a host of important safety benefits, including six Further enhancing driver safety is a collapsible steering column and brake pedal, while pedestrian safety has been improved with an impact absorbing bonnet design, recessed fog lamps and shatterresistant polycarbonate headlamp covers. Rear LED brake lights are also standard on the Isuzu five-star ANCAP safety rating~ to keep you safe whether you're hard at work or on an adventure.

~On 4x4 crew cab models.



For added safety and protection – six airbags: dual front, curtain and side



Included on all D-MAX models, Electronic Stability Control (ESC) detects if the vehicle is nder or oversteerin



The cabin is constructed from high tensile tailor blank welded steel for unyielding strength and rigidity of the passenger safety cell

A larger cabin interior across the range provides greater head and leg room for all passengers, and a contoured seat design with 'wrap-around' bolsters provide increased shoulder, back and base support delivering more comfort for occupants. Thoughtfully-designed wider door arches and A-pillar assist grips allows for easy access to the cabin.





Like Isuzu trucks, the Isuzu D-MAX is built to work hard for all professionals - whether you're over its predecessor, thanks to a larger side rail cross-section and the addition of 'cross member working the land, a building site or keeping the family on the go. A redesigned ladder chassis to chassis rail' braces. With improved stability while both loaded and towing, it ensures long builds on the engineering successes of this robust platform. Dubbed the "i-GRIP" (Isuzu Gravity term durability when exposed to harsh driving environments and enables 4x4 models a 3-tonne Response Intelligent Platform), this proven chassis has increased strength and rigidity by 42% braked towing capacity.

Our ingenious 'Space Cab' is a worker's best mate – it features convenient rear 'wing' doors to To top it off, all SX and LS-M models come standard with tough 'All-terrain' tyres, which make make cabin access even easier and pull-down 'jump' seats for additional passengers. For even light work of even the roughest of terrain but also offer a smooth ride on-road with low road noise. more versatility, match your D-MAX with a genuine Isuzu D-MAX tray body. Choose from our range of alloy or steel bodies and accessories so your equiped to get the job done.



old down rear seats in Space Cab with storage compartmen


Long wheelbase and cab-to-axle for greater load stability



Spacious rear cabin and rear 'wing' door access in Space Cab

DEPEND ON IT FOR





"Terrain Command" 4WD system allows for simple shift from 2WD high, 4WD high and 4WD low

Large front brakes with ventilated disc



Angle dimensions of the LS-U models only



Steel underbody guards on sump and transfer case

DEPEND ON IT FOR FIDUENTURE

The Isuzu D-MAX will redefine your spirit for adventure and allow you to go places you've The Isuzu D-MAX also features a "Terrain Command" 4WD select dial, allowing the driver to never before dared. Independent double wish-bone with coil springs and gas shock absorbers adjust between 2WD-high and 4WD-high modes while travelling at speeds of up to 100km/h, guarantee superior front end grip and steering control, while the rear suspension consists of long and 4WD-low for rugged terrain. The new automatic transmission also has 'Hill-Descent' and span leaf-springs (under-slung on low-ride models and over-slung on high-ride models) resulting 'Hill-Ascent' modes for when the going gets tough, and steel underbody protection along with in excellent power down and stability under every road condition with or without loading.

generous ground clearance adds further piece of mind when pushing the limits off-road.

4x4 SX Crew Cab Ute in Mineral Grey metallic



all the comforts, technology and safety features you've come to expect from a passenger car. is simply better - Depend on it!

Over 4,000,000km of strenous testing in searing heat, heaving rain, hail and even snow was conducted in the development of the latest Isuzu D-MAX to ensure it never lets you down. We've called on our truck engineering heritage to bring you a tough reliable partner and refined it with



Engine					
Series	Isuzu 4JJ1-TC Hi-Pov	ver			
Description	3.0 litre turbo diesel,	bo diesel, in-line 4-cylinder, DOHC, 16-valve			
Maximum torque	380 Nm @ 1800→28	800 rpm (automatic & n	nanual)		
Maximum power	130 kW @ 3600 rpm				
Bore x stroke	95.4mm x 104.9mr	n			
Displacement	2999cc				
Compression ratio	17.3 : 1				
Cylinder head	Isuzu-patent special	aluminium alloy with double-walled water jacketing			
Valve gear	Chain-driven dual over	verhead camshafts, roller rockers, 4 valves/cylinder			
Induction		sure common rail direct fuel injection with Variable Swirl tercooled Variable Geometry System (VGS) turbocharger			
Cylinder block	Cast iron upper with pistons with nickel c	n induction-hardened cylinder bores, cast alloy lower; composite oil rings			
Emission level	Euro 4				
Alternator	90 amp				
Transmissions					
Manual	Isuzu MUX 5-speed 275mm diameter clu		e capacity and output reduction		
Automatic	Aisin AW TB50-LS 5-speed with sequential shift and brake shift lock electronically controlled, tri-mode with Adaptive Grade Logic Control and fuel-saving lock-up torque converter on gears 3, 4 & 5				
			in varied-gradient ascents, beed with engine braking		
	► Hill-ascent and hill-	descent control			
Ratios: 1	1st 2nd 3rd 4th 5th Reverse	5-speed Manual 4.332 2.561 1.492 1.000 0.791 3.947	5-speed Automatic 3.520 2.042 1.400 1.000 0.716 3.224		
Final drive	4x2 SX LS 4x4 Snorkelled diff breath	3.416 3.727 3.727 ners to reduce mud blog	3.727 3.727 3.727 3.727		
Transfer gearing	4x4 low-range 4x4 high-range	2.482 1.000	2.482 1.000		
4x4 system	"Terrain Command" c at up to 100km/h	ontrol with 'shift on the	fly' 2-high↔4-high selection		
Drivetrain system	Traction Control Syst on all model variants	em (TCS) & Electronic	Stability Control (ESC)		

Frame	Separate, full-length heavy-duty truck chassis with 7 cross members on low ride models & 6 cross members on high ride models
Front suspension	4x2 SX Low-Ride model: Independent, coil springs, gas shock absorbers, upper and lower wishbones, stabiliser bar
	4x2 High-Ride & 4x4 models: Independent, high-ride, coil springs, gas shock absorbers, upper and lower wishbones, stabiliser bar
Rear suspension	4x2 SX Low-Ride model: Alloy-steel underslung semi-elliptic leaf springs, heavy-duty on cab chassis; gas shock absorbers
	4x2 SX High-Ride & 4x4 models: Alloy-steel overslung long-span semi-elliptic leaf springs, heavy-duty on cab chassis and LS-M; gas shock absorbers
Axles	
Front	Independent 4x4: fully floating with outer CV, inner double offset joints and equal length driveshafts. Ratings: Low-Ride 1250kg; High-Ride 1350kg
Rear	Rigid semi-floating banjo with hypoid final drive and dual tapered needle roller bearings. Rating: 1870kg

Steering

Engine-speed-sensitive variable capacity power-assisted rack and pinion system; 3.2 turns lock-to-lock via tilt-adjustable steering wheel

Brakes

Power-assisted via 10.5" servo unit; 300mm diameter ventilated front discs with 2-piston callipers, 295mm rear drums (280mm on Low-Ride models)

Anti-lock Brake System (ABS) with Electronic Brakeforce Distribution (EBD) and Emergency Brake Assist (EBA) Central pull up park brake

Wheels & Tyres	
4x2 SX (Low-Ride)	15" x 6.5" drilled silver-finish steel; 215 / 70 R15c Highway Terrain
4x2 SX (High-Ride)	16" x 7" drilled silver-finish steel; 245 / 70 R16 All Terrain
4x2 LS-U (High-Ride)	17" x 7" alloy; 255 / 65 R17 Highway Terrain
4x4 EX, SX	16" x 7" drilled silver-finish steel; 245 / 70 R16 All Terrain
4x4 LS-M	16" x 7" alloy; 245 / 70 R16 All Terrain
4x4 LS-U	17" x 7" alloy; 255 / 65 R17 Highway Terrain

Warranty & Roadside Assistance

New vehicle warranty and premium roadside assistance for 5 years/130,000km, whichever occurs first, for eligible customers; excludes accessories and trays.

Please read with current vehicle brochure. Isuzu UTE Australia reserves the right to change specifications and features at any time.



Published January 2014.

Colours depicted herein may differ from actual due to the printing process. Please refer to isuzuute.com.au or consult your authorised Isuzu UTE Dealer for current availability of models, options, specifications, colours and Isuzu UTE Genuine Accessories.



FEATURES AND

SPECIFICATIONS

A A Side Constantion And 44 Anone Call Provide Anone Call ANA SOCIAL SOCIAL At A Single At Single At Crow AACCON Atterent Attacion Attaction FEATURES sx LS-U ΕX sx sx LS-U sx sx LS-M LS-U sx sx Engine 2999cc DOHC 4cyl. with intercooled turbo charger, Euro 4 (380Nm, 130kW) Transmissions 5-speed manual transmission 5-speed "Rev-Tronic" automatic transmission with sequential sport mode • . . . • . • . Safety & Security 4-channel 4-sensor ABS (Anti-lock Brake System) with EBD (Electronic Brakeforce Distribution) ۲ ٠ • . • • • . • . • Electronic Stability Control (ESC) Traction Control System (TCS) . . . • . • Emergency Brake Assist (EBA) • . • . • . 6 Airbags: dual front, curtain and side airbags Height-adjustable upper mounts for front seat belts • . Pre-tensioners with load limiters for front seat belts (*Dual Pretensioners) . . . •* •* •* •* 3-point retractable seat belts for all rear and centre seating positions (*centre seat not applicable) . •* •* • Childseat tethers x 3 (rear - outer and centre) . • Height-adjustable head restraints for all full-size seats Child-proof rear door locks Single 10.5 inch servo brake master cylinder • • . • . . Side anti-intrusion bars inside all doors Engine immobilizer • . • Warning alarm: headlights or parking lights on with ignition key removed Rear window demister High Density Polyethylene (HDPE) fuel tank High mount brake light on cabin • . • . • . Dual horn • . Protection Under-front steel plate skid/splash shield (high-ride) • • • • • . • ٠ • . • Under-front aero cover (low-ride) . Steel plate quards; sump, transfer case, fuel tank leading edge; sheet steel under fuel tank Suspension and Brakes Standard rear leaf suspension • • . . . Heavy duty rear leaf suspension . Front independent, coil spring suspension w/gas shock absorbers, upper and lower wishbones & stabiliser bar • . . . • . • . Heavy-duty brakes: 300mm ventilated front discs w/twin-pot calipers, 295mm rear drums . • . . Heavy-duty brakes: 280mm ventilated front discs w/twin-pot calipers, 295mm rear drums • . Seating Front bucket whiplash protection seats Height-adjustable driver's seat • • Split-fold rear seat (*with centre arm rest) •* •* •* . •* . Rear twin pull-down jump seats . . Rear centre seat headrest In-cabin Storage Upper and lower glovebox compartments Power outlet in alovebox • . . . • • Centre floor console with rear flipout cup holder (*AT models only) •* •* . . . Dual-purpose driver and front passenger cup holder tray Rear passenger door cup holders . Map pockets on backs of front seats • Overhead console with twin map lights & flip-down sunglasses case . . . Front door storage compartment with bottle bulge . . ۲ ۲ Two coat hooks . Tool storage under rear flip-up seats

A Solution of the second secon

Caso Historia cap chasis

Cap Chasis

Cap Chassis

Cable

Cap Ute

Jte

Cap



FEATURES AND SPECIFICATIONS

	Coord
	500 C00 C00 C00 C00 C00 C00 C00 C00 C00
	th th<
SPECIFICATIONS	
	bitte
FEATURES	SX SX SX LS-U EX SX SX LS-U SX SX LS-M LS-U
RearTub	
Double-walled ute tub	
4 cargo tie-down hooks inside ute tub	
Cab guard frame (unboltable for canopy and tonneau cover fitting)	
Exterior Style	
Short front overhang for optimal manoeuvrability & approach angle	
Halogen multi-reflector headlights	
Projector lens headlights for extra low beam depth & reduced flare	
Front fog lights	
Chrome radiator grille	
Gun Metal Grey radiator grille	
Black front bumper and radiator grille Colour-coded front bumper	
Space cab rear "wing" doors	
Aluminium side steps	
Rick door handles	
Chrome door and tailaate handles	
Lockable tailgate	
Chrome fold-in power door mirrors with integrated turn indicators	• • •
Colour-coded power door mirrors with integrated turn indicators	
Black door mirrors	•
Centre front roof-mounted bee-sting aerial	• • • •
LED rear combination lamps	• • • •
One-step chrome-plated rear bumper	• • •
Cabin Amenities	
Air-conditioning with integrated heater/demister	
Pollen & fine particle air filter	
Power windows with one-touch down driver's window	
Power windows with one-touch up/down driver's window with safety stop and delay closing	
Central locking with keyless entry	
Power-adjustable door mirrors	
Cruise control "Sky Sound" roof-mounted sound system with 6 speakers (mounted in front dash, front doors and roof)	
Sky Sound roor-mounted sound system with 6 speakers (mounted in front dash, front doors and root) CD/MP3/FM/AM/AUX audio unit with Micro USB, iPod® input and Bluetooth® connectivity	
CD/MP3/FM/AM/AOX audio unit with WICPO USB, iPod® input and Bluetooth® connectivity	
Tilt-adjustable steering wheel with power steering	
Leather steering wheel with cruise and audio controls	
Multi-Information Display (MID): odometer, trip odometers A & B	
Multi-Information Display (MID): as above plus fuel economy, range and maintenance distance	
Electro-luminescent gauges	
Terrain Command 4WD select dial	
Windscreen wipers with intermittent sweep mode	
Windscreen wipers with variable intermittent sweep mode	• • • •
Day/night interior rear view mirror	
Sun visors with vanity mirror (left) & ticket retaining strap (right)	• • • •
Fixed A-pillar assist-grips for driver and front passenger	
Folding assist-grips for driver and front passenger	
Folding assist-grips for rear passengers	
Carpet flooring	• • •
Easy-clean vinyl flooring	

FEATURES AND DAAX SPECIFICATIONS

	the contract of the contract o							
	the state of the s	the second secon	AND CONTRACTOR	in the second se	Uno Cross Cross	.5	/	
	Star Star	He He	chost c	Constant Con	3º a	SST NO		
D-AAX SPECIFICATIONS	3 2	Joe Jee Jee Co	્રે હે		20 20 C.	Loop Loop Loop Loop Loop Loop Loop Loop	Color D	
	and	n lo	8	e e e	and C.	n n		
	and a start and a start	AR CLOW ANA SIGNE	Sill. A	5° 5°	ACTO	Len Att Cen	Att	
	at by the area	AT AT	At At	At 0	t At	At	at:	
SPECIFICATIONS	SX SX LS	S-U EX S	sx sx	LS-U S>			ls-u	
D-MAX ADR 81/02 [△] Fuel Consumption Values								
Transmission (MT = Manual, AT = Automatic)	MT MT AT MT	T/AT MT MT	AT MT/AT	MT/AT MT/	AT MT/AT	MT/AT M	IT / AT	
FUEL CONSUMPTION (litres/100km)								
Combined			3/8.1 8.3/8.1				8.3/8.1	
Urban				0 10.6/10.0 10.6/				
Extra Urban CO² (g/km)	6.8 6.9 6.9 7.0/	0/7.0 7.0 7.0	0/7.0 7.0/7.0	7.0/7.0 7.0/7	2.0 7.0/7.0	7.0/7.0 7	7.0/7.0	
Concernation (g/km)	212 216 211 220,	0/214 220 220	1/21/1 220/21/	1 220/214 220/2	21/1 220/21/1	220/21/ 22	20/21/	
Urban				1 278/264 278/2				
Extra Urban			.,	5 186/185 186/		,	,	
Dimensions (mm unless stated otherwise)								
Nheelbase	3095 3095 3095 30	095 3095 30	095 3095	3095 309	5 3095	3095 3	3095	
Overall length	5040 5190 5190 52	295 5040 50	040 5020	5295 502	0 5190	5190 5	5295	
Dverall width (excluding door mirrors)	1775 1775 1860 18	860 1860 18	860 1860	1860 186	0 1860	1860	1860	
Overall height (*depends on body fitted)			780* 1780*	1790 178			1795	
Front overhang			05 905	905 90			905	
Rear overhang (*depends on body fitted)			40* 1020*	1295 102			1295	
Front and rear track			570 1570	1570 157			1570	
Ground clearance Furning circle diameter between kerbs (metres)			25 225 2.6 12.6	235 22			235 12.6	
Approach angle			2.0 12.0 9.4° 29.4°	30° 29.4			30°	
Departure angle			7.4° 27.4°	22.7° 27.4			22.7°	
Ramp-over angle			1.7° 21.7°	22.4° 21.7			22.4°	
.oad area (mm)								
Cab to rear axle	1235 430 430 43	130 1235 12	235 740	740 43) 430	430	430	
Length (top)	- 1485 1485 14	485 -		1795 -	1485	1485	1485	
Length (floor) (*inside genuine accessory tray body)	2550* 1552 1552 15		50* 1950*	1825 165		1552	1552	
Maximum width (*inside genuine accessory tray body)			77* 1777*	1530 177			1530	
Width between wheel houses		105 -		1105 -	1105		1105	
Depth	- 465 465 46	465 -		465 -	465	465	465	
Interior (mm) Leg room - front	1070 1070 1070 10	070 1070 10	070 1070	1070 107	0 1070	1070	1070	
Leg room - rear		915 -	- 740	740 91			915	
Shoulder room - front			460 1460	1460 146			1460	
Head room - front			005 1005	1005 100		1005	1005	
flass (kg)								
are mass# (*depends on body fitted) (^ +5kg for automatic)			60*^ 1741*^				1935^	
otal load capacity (*depends on body fitted) (^ -5kg for automatic)			90*^ 1209*^				1015^	
iross Vehicle Mass (GVM)			950 2950	2950 295			2950	
Bross Combination Mass (GCM)			950 5950	5950 595			5950	
Aaximum towing mass (braked trailer)			500 3500	3500 350			3500	
Aaximum towing mass (non-braked trailer)			50 750	750 75			750	
Aximum tow ball download (when fitted with genuine Isuzu UTE tow kit)			150 350	350 35			350	
Fuel tank capacity (litres)	76 76 76 7	76 76 7	76 76	76 76	76	76	76	


^aADR 81/02 is the Australian government's standard lab-based test. Your fuel figures depend on driving style, conditions of usage, vehicle condition and load, and other factors. iPod® is a trademark of Apple Inc. The Bluetooth® word mark is owned by Bluetooth SIG, Inc. Not all devices will be compatible and functionality will vary depending on the device. *Tare Mass - unladen mass of vehicle and 10 litres of fuel; excludes tray body for cab chassis vehicles.



MODEL RANGE AND COLOUR OPTIONS


4x4 LS-U Crew Cab Ute & 4x2 LS-U Crew Cab Ute High-Ride





4x4 LS-M Crew Cab Ute






4x4 SX Crew Cab Ute & 4x2 SX Crew Cab Ute High-Ride





4x4 SX Crew Cab Chassis





3095

- 5190

4x2 SX Crew Cab Ute Low-Ride



Colour Options







- 905




1190

4x4 LS-U Space Cab Ute







4x4 SX Space Cab Chassis



4x4 SX Single Cab Chassis



4x4 EX Single Cab Chassis



4x2 SX Single Cab Chassis





One por



E040











Ash Beige metallic

Cosmic Black mica

Mineral Grey metallic


Nautilus Blue mica

Splash White


Titanium Silver metallic


Tundra Green mica













Spirit of Truck

www.isuzuute.com.au Toll Free: 1300 147 898

This brochure should be read with the separate Isuzu D-MAX Specification insert. Isuzu UTE Australia Pty Ltd (ABN 80 129 563 739, 929 Kingsford Smith Drive, Eagle Farm, Queensland, 4009, Australia) reserves the right to change specifications and content without notice, subject to any applicable Federal, State or Territory laws or regulations which may apply. Any accessories shown herein are illustrative and generally are extra-cost optional, not standard equipment. Colours depicted herein may differ from actual due to the printing process. Please refer to isuzute.com.au or consult your authorised Isuzu UTE Dealer for current availability of models, options, specifications, colours and Isuzu UTE Genuine Accessories. No part of this brochure can be reproduced without the written permission from Isuzu UTE Australia. All information is true and correct at the time of publishing, December 2013. Printed in Australia. Copyright Isuzu UTE Australia Pty Ltd 2013.